


C200P Scanner-Dimensioner

Masterdata and Precision Applications



The Cubetape C200P is designed for Masterdata and Precision applications and will:

- eliminate errors and guesswork
- improve efficiency and reduce overheads
- improve operations
- integrate easily with existing systems.

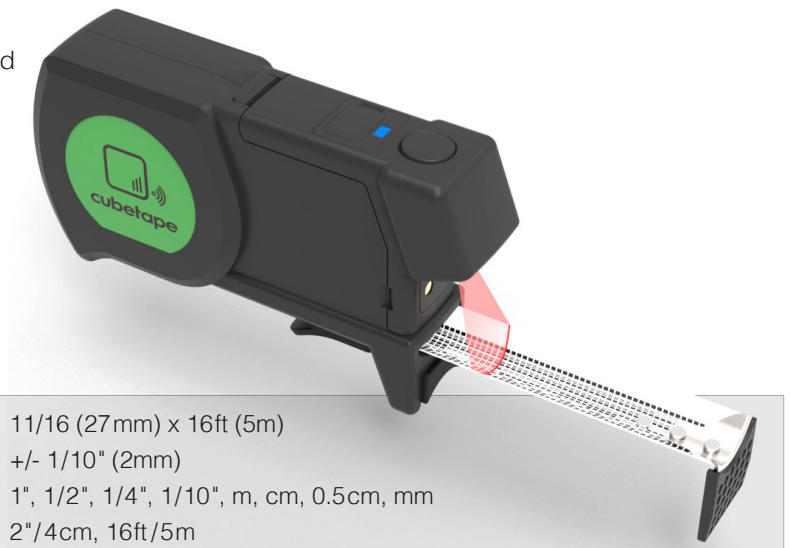

Specifications:

| | | |
|---------------------|--|---|
| Dimensioning | Tape Accuracy Output US/Metric Min/max | 11/16 (27mm) x 16ft (5m) +/- 1/10" (2mm) 1", 1/2", 1/4", 1/10", m, cm, 0.5cm, mm 2"/4cm, 16ft/5m |
| Scanning | Image Type Symbolologies | Best in class CMOS All Common 1D, 2D |
| Comms | Wireless 2.4G Bluetooth V5 USB C Port | Long Range HID, USB Serial (200m outdoor line of sight) Direct (HID), Application (SPP), Low Energy (BLE) Data Transfer, Recharge, Firmware Update |
| Functions | Data Packets Modes Control Characters | Single Item, Multi Item, Online, Batch, Alibi Highly Configurable |
| Power | Li-Po Battery Duty Cycle Standby | Industrial 1200mAh, maximum 2 hour recharge, replaceable 8 hour minimum @ high duty cycle 30 day minimum |
| Usability | Single Button LEDs Buzzer | Power/Scan/Dimension Pairing and Power indications. Decode/Connect/Config indications |
| Physical | Size Weight | 5.8 x 3.3 x 1.4 in / 146 x 85 x 35mm 14oz/400g |
| Regulatory | EMI/RFI ROHS LFT | FCC Part 15 Class B, ICES, EU EMC Directive, Taiwan EMC Complies 2002/95/EEC NTEP, OIML R35, NMI R129 |
| Other | Inclusions Warranty Working Temperature Humidity Ambient Light | 1W Charge Cradle, USB C Cable, 2.4G RF Dongle, Holster Minimum 12 months on electronics*, excluding accessories - 20 to 160 F / -30 to +70C 5% to 95% relative humidity (no condensation) Works in normal indoor and outdoor settings |
| Options | Charge Cradle Protective Sleeve | 5 Way Silicon |
| Spares | Battery, Tape Cassette | |

Note: *Warranty period can vary by region.